

3-LEVEL DIMMING HONEYCOMB LIGHT

Hexagon LED light kit • 4 hexagons inside an outer frame • 2430 × 4835 mm



Check the quantity of lamps and accessories after opening the package.

SPECIFICATIONS

Model	3-level dimming honeycomb light	Luminous flux	100–120 lm/W
Voltage	220 V	Colour rendering index	> 90
Luminous surface	22 mm	Colour temperature	6500 K
Power	360 W	Complete kit	Outer frame + inner frame
Size	2430 × 4835 mm		

PARTS LIST



T-type connector

×1




L-type connector

×4



Straight connector

×7



Y-type connector

×7



V-type connector

×11



Power cord

×1



Suspension wire

×15




Nylon cable ties

Supplied



Tube 565 × 22 mm

×21





Tube 1175 × 22 mm

×12

STEP 1. CONNECT THE LIGHT TUBES WITH THE SPLICING PARTS AS SHOWN BELOW.

Units: mm

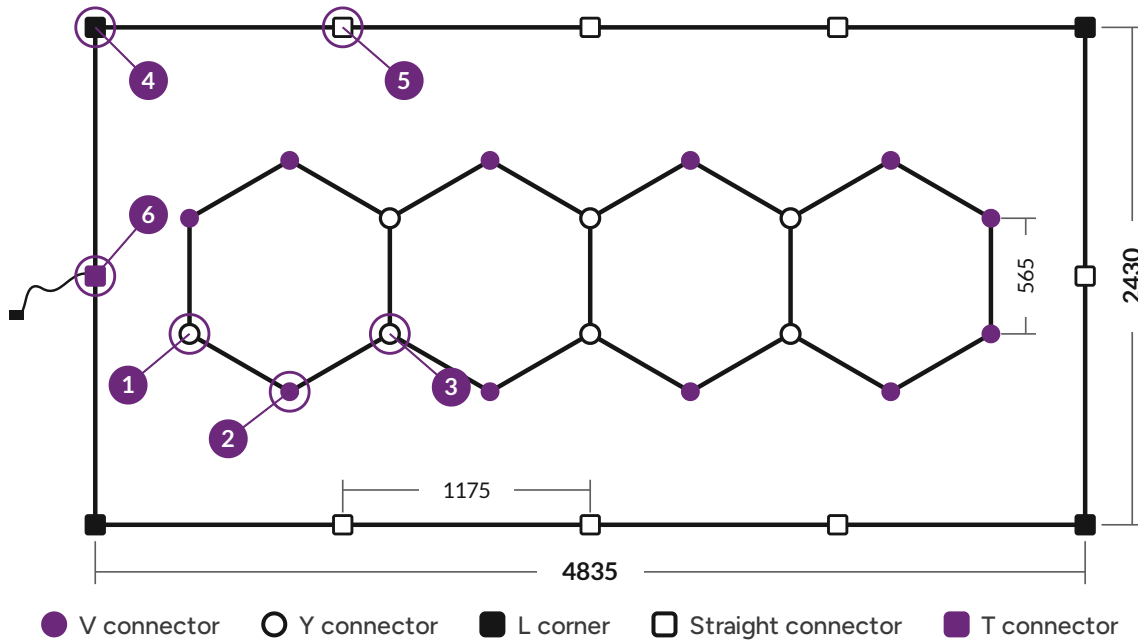

1 Power-feed Y connector

Fit the vertical tube and the lower tube, then plug the lead into the third port.



2 V connector

Joins two tubes at each outer hexagon point.



3 Y connector

Joins three tubes where two hexagons share a side.




4 L connector

Joins the frame tubes at each of the four corners.



5 Straight connector

Joins two frame tubes end to end.



6 T connector + power cord

Joins the side frame tubes and takes the mains power cord.



CAUTION

1. Take care when connecting the tubes to the connectors. The copper pins inside the connectors can be damaged by incorrect fitting or excessive force.
2. Any modification to the wiring must be carried out by a qualified electrician only.